


NOTE:  
 3' RISERS WILL BE INSTALLED, AT 4" OR 6" SERVICE  
 THE END OF SERVICES 9'-11' (AS SPECIFIED)  
 DEEP.  
 5' RISERS FOR 12'-14'+ DEEP SERVICES  
 UNLESS GROUND WATER IS ENCOUNTERED DURING EXCAVATION.  
 ALL BENDS AND THE LAST TWO SECTIONS OF PIPE SHALL HAVE SOLVENT JOINTS.  
 WYE BRANCH UNLESS SPECIFIED OTHERWISE



PROFILE

NOTE: SEE STANDARD PLATE LV-ST-13 FOR MnOPS REQUIREMENTS RELATED TO FUTURE LOCATING.

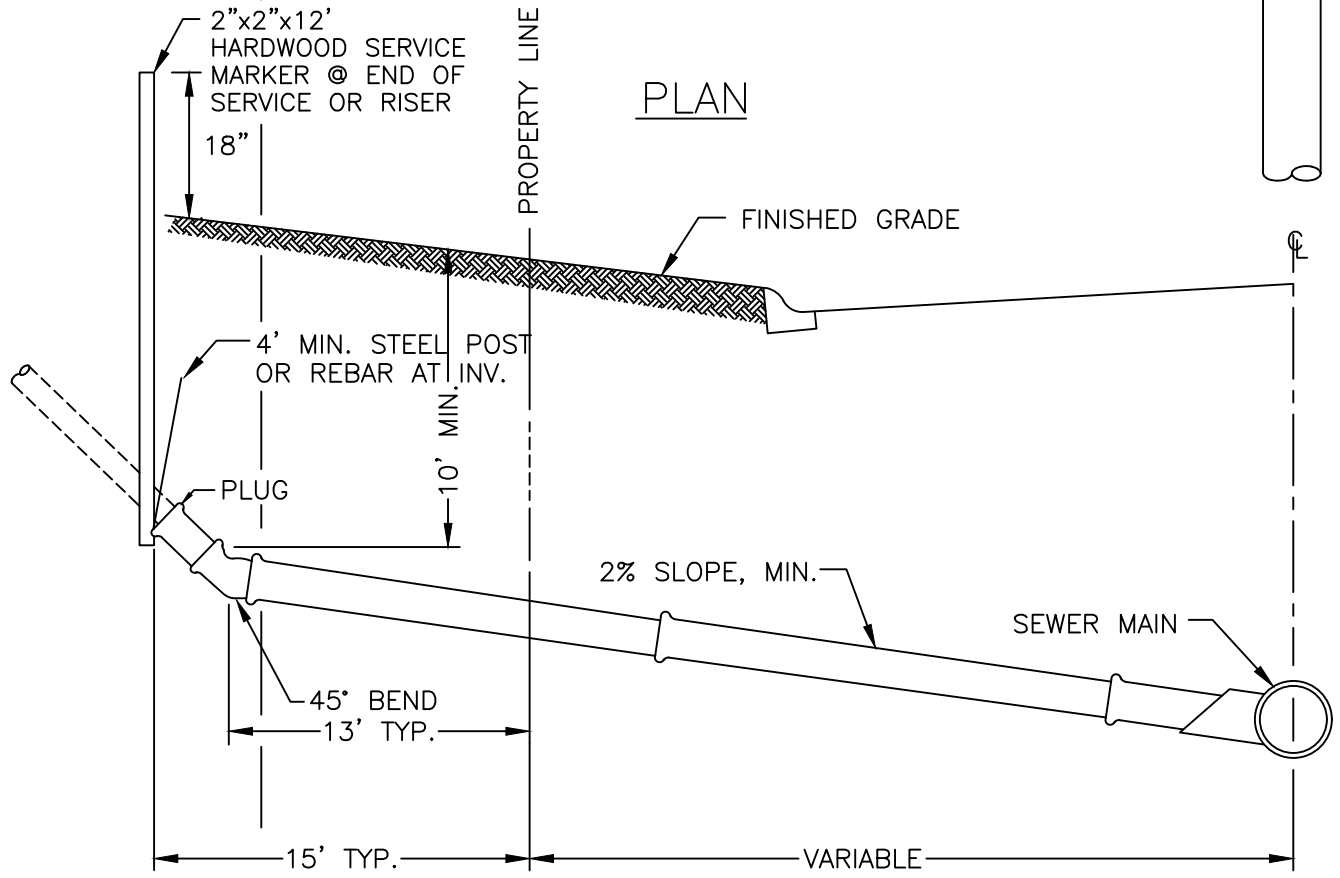

SANITARY SEWER  
 TYPICAL HOUSE SERVICE  
 (4" OR 6" DIAMETER SERVICE)

PLATE NO. LV-SS-6

DATE 02/2024